


Features:

- Accepts 8 incoming telephone lines
- Distribution to 28 telephone locations (21 for lines 1 thru 4, 7 for lines 5 thru 8)
- ISDN or ADSL digital data capable
- RJ-45 patch cables allow for flexibility in line distribution
- Surge protection
- LED monitoring for active line and surge
- Security system compatible

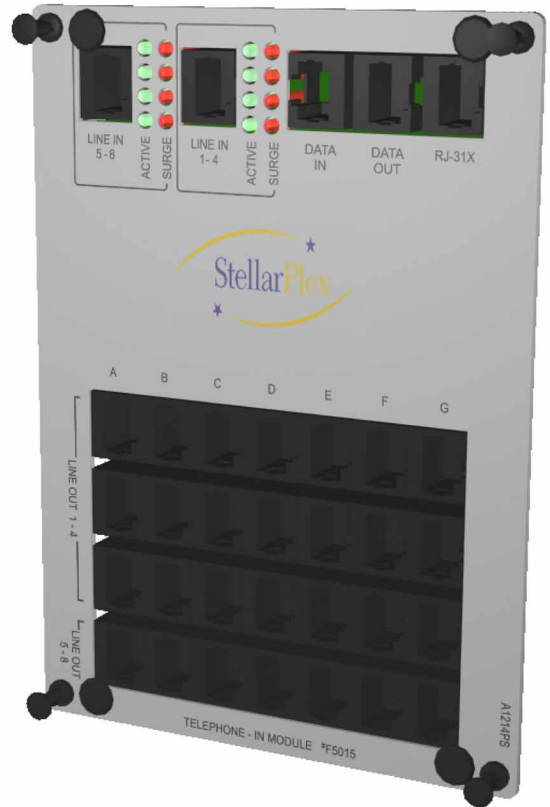

Technical Specifications:

- DIP switches to deactivate security system line seizure
- Voice ports meet TIA-568A Category 3 specifications
- All RJ-45 connectors wired to T568A standard
- 50 microns gold plated contact points

