

Features: _____

Ethernet network Hub for 4 devices


Separate cascade port to connect 2 Hubs
(supports 8 devices total)

Green LED link indicators

Red LED collision indicators

LED power indicator

Mounts in single size module space for
StellarPlex systems

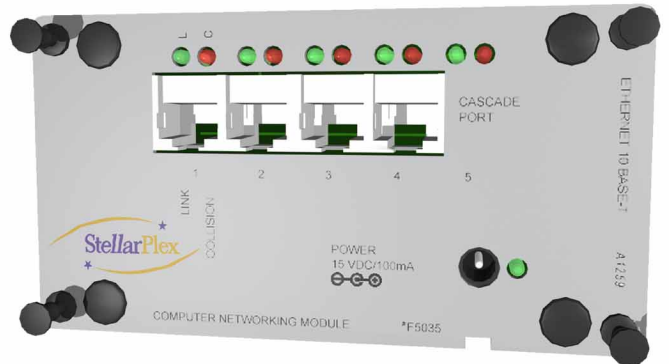

Technical Specifications: _____

IEEE 802.3 (ethernet) compliant

8P8C (RJ-45) connectors

Auto detection and port termination upon line fault

10 Mbps transmission rate

Power requirements: 15 Vdc, 110 mA

Used with the StellarPlex Power Distribution Module